


SPECIFICATION FOR APPROVAL

REF :


PAGE: 1

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU6025□□□□F□-□□□
		ABC'S ITEM NO.	

. CONFIGURATION & DIMENSIONS :

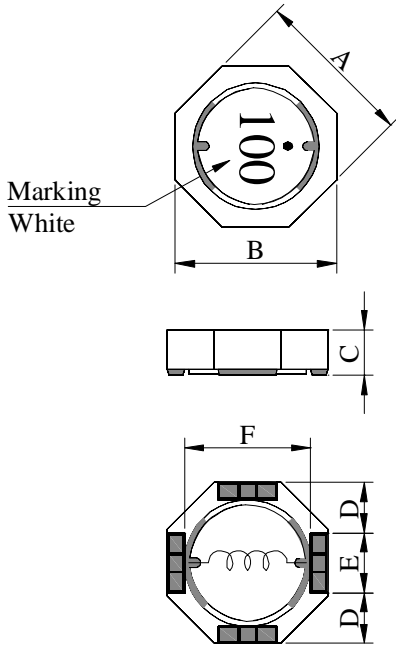

A :	6.20	±0.30	m/m
B :	6.50	±0.30	m/m
C :	2.50	±0.30	m/m
D :	2.15	typ	m/m
E :	2.20	typ	m/m
F :	4.90	typ	m/m
G :	2.40	ref	m/m
H :	4.90	ref	m/m
I :	1.10	ref	m/m

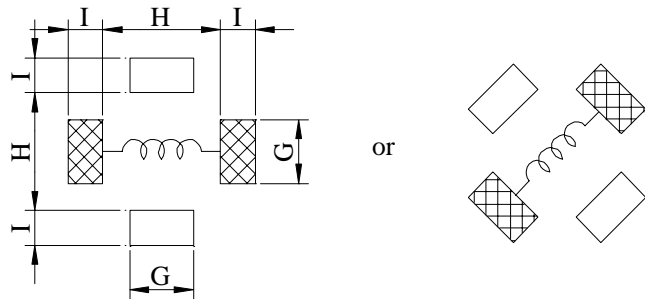


(PCB Pattern suggestion)

. SCHEMATIC DIAGRAM :




. MATERIALS :

- a . Core : Ferrite DR core
- b . Core : Ferrite RI core
- c . Wire : Enamelled copper wire (class F)
- d . Adhesive : Epoxy resin
- e . Terminal : Ag/Ni/Sn
- f . Remark : Products comply with RoHS' requirements

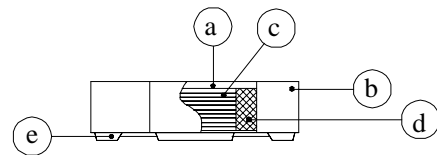

Peak Temp : 260 max.
 Max time above 230 : 50sec max.
 Max time above 200 : 70sec max.

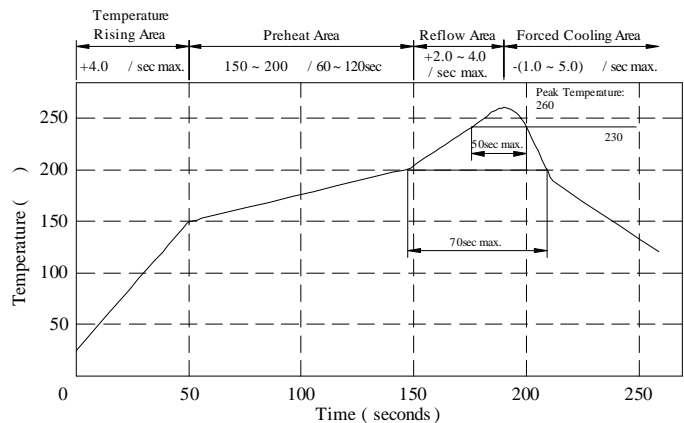

. GENERAL SPECIFICATION :

- a . Temp. rise : 30 typ.
- b . Rated current :
Base on temp. rise & L / LOA=35% typ.
- c . Storage temp. : -40 ----+125
- d . Operating temp. : -40 ----+105
- e . Resistance to solder heat : 260 .10 secs.

SPECIFICATION FOR APPROVAL

REF :


PAGE: 2

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU6025□□□□F□-□□□
		ABC'S ITEM NO.	

ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (μ H)	Q ref.	Test Freq. (Hz)		RDC (m Ω)		SRF (MHz)	Irms (mA)	Isat (mA)
			L	Q	typ.	max.	typ.	typ.	typ.
SU60251R2YF□-□□□	1.2 \pm 30 %	8	100K	7.96M	14.5	19	120	4000	3200
SU60252R2YF□-□□□	2.2 \pm 30 %	8	100K	7.96M	18.5	24	65	3400	2350
SU60253R3YF□-□□□	3.3 \pm 30 %	8	100K	7.96M	21.0	27	50	3200	2000
SU60254R7YF□-□□□	4.7 \pm 30 %	8	100K	7.96M	27.0	35	42	2700	1550
SU60256R8YF□-□□□	6.8 \pm 30 %	8	100K	7.96M	32.0	42	36	2400	1300
SU60258R2YF□-□□□	8.2 \pm 30 %	8	100K	7.96M	40.0	52	30	2200	1250
SU6025100YF□-□□□	10.0 \pm 30 %	12	100K	2.52M	44.0	57	25	2000	1050
SU6025150YF□-□□□	15.0 \pm 30 %	12	100K	2.52M	66.0	86	22	1800	920
SU6025220YF□-□□□	22.0 \pm 30 %	12	100K	2.52M	100.0	130	18	1600	700
SU6025330YF□-□□□	33.0 \pm 30 %	12	100K	2.52M	140.0	180	12	1200	640
SU6025470YF□-□□□	47.0 \pm 30 %	12	100K	2.52M	190.0	250	10	1000	480
SU6025680YF□-□□□	68.0 \pm 30 %	10	100K	2.52M	280.0	365	8	800	400
SU6025101YF□-□□□	100.0 \pm 30 %	24	100K	796K	385.0	500	7	700	350
SU6025151YF□-□□□	150.0 \pm 30 %	30	100K	796K	590.0	770	5	540	280
SU6025221YF□-□□□	220.0 \pm 30 %	20	100K	796K	950.0	1250	4	420	240

- 1) . □ : Packaging Information... A □ : Bulk B □ : Taping Reel
- 2) ."- □□□":Reference code
- 3) . Inductance Test Freq. : 100KHz / 0.1V
- 4) . Isat base on L / L0A=35% typ.
- 5) . Irms base on Temp. rise 30 typ.

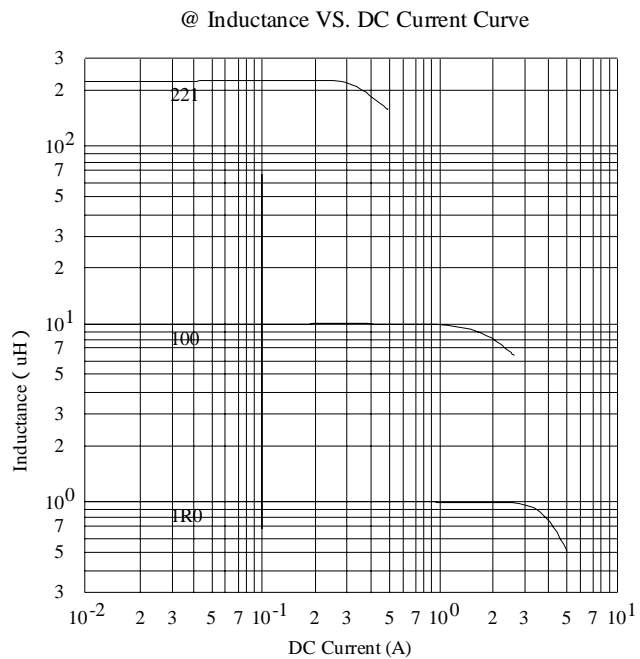

AE-001A



SPECIFICATION FOR APPROVAL



REF :

PAGE: 3

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO. ABC'S ITEM NO.	SU6025□□□□Fo-□□□
---------------	--------------------------------	---------------------------------	------------------

PACKAGING INFORMATION :

(1) Configuration

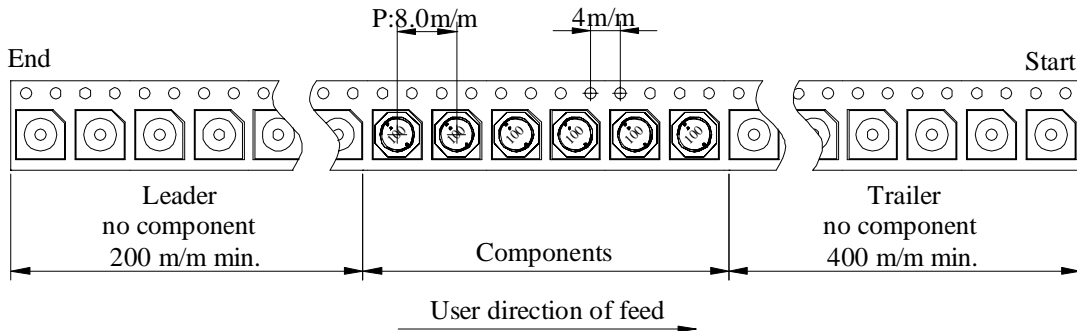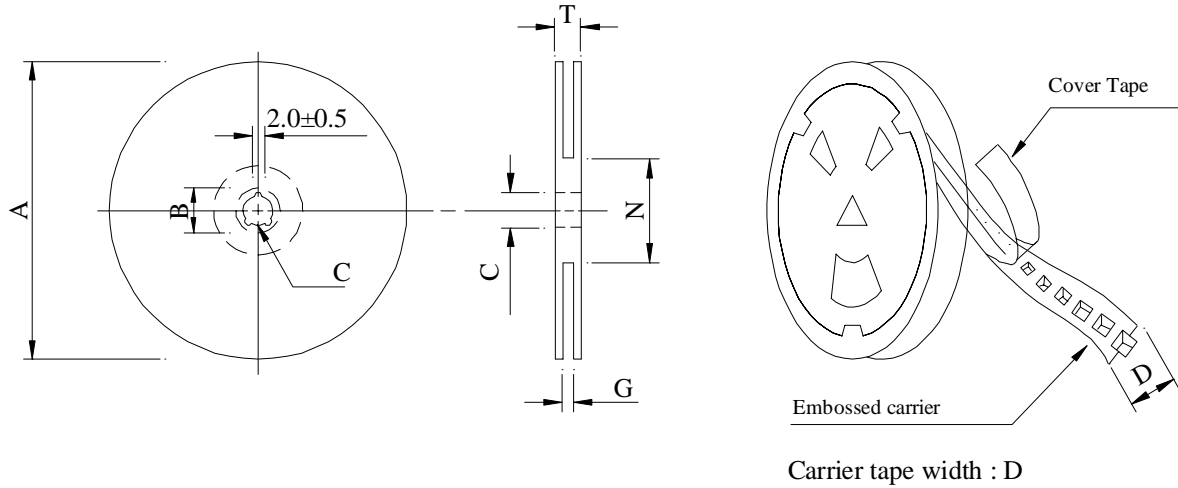

(2) Dimensions

Unit:m/m

Sytle	A	B	C	D	G	N	T
07 - 12	178	21 ± 0.8	13	12	14^{+0}	50^{-0}	16.5

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
SU6025	600	125	07 - 12	24,000	7.5	42 x 41 x 24

AE-001A

SPECIFICATION FOR APPROVAL

REF :


PAGE: 5

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU6025□□□□F□-□□□
		ABC'S ITEM NO.	

. RELIABILITY TEST :

Test item	Specification	Test condition						
Solderability	More than 90% of the terminal electrode shall be covered With fresh solder.	Preheat : 150±25 for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5 Flux : Rosin Dip time : 4±1 seconds						
Thermal shock test (Temp. cycle)	Inductance shall not change more than ±30%	<table style="width: 100%; border: none;"> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">$\frac{-25 \pm 2}{30 \text{ minutes}}$</td> </tr> <tr> <td style="text-align: center;">Room temp. 15 minutes</td> <td style="text-align: center;">→</td> <td style="text-align: center;">$\frac{85 \pm 2}{30 \text{ minutes}}$</td> </tr> </table> <p>Total : 50 cycles</p>	Room temp. 15 minutes	→	$\frac{-25 \pm 2}{30 \text{ minutes}}$	Room temp. 15 minutes	→	$\frac{85 \pm 2}{30 \text{ minutes}}$
Room temp. 15 minutes		→	$\frac{-25 \pm 2}{30 \text{ minutes}}$					
Room temp. 15 minutes		→	$\frac{85 \pm 2}{30 \text{ minutes}}$					
Humidity Resistance test		Temperature : 40±2 Humidity : 90 ~ 95% Applied current : Per spec. Time : 500 hours						
High temp. Resistance test	Temperature : 105±2 Applied current : Per spec. Time : 500 hours							

AE-001A



SPECIFICATION FOR APPROVAL

REF :

PAGE: 6

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU6025□□□□F□-□□□
		ABC'S ITEM NO.	

UL CARD :

OBMW2 September 8, 2000
Magnet Wire-Component

JUNG SHING WIRE CO LTD E174837
231 CHUNG CHENG RD, SEC 3 JEN-TEH HSIANG, TAINAN
HSIEN TAIWAN

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
AIW	---	Polyamideimide	---	---	MW81-C	220
CFUEWB	---	Polyurethane	---	---	MW75C	130
EIAIW	---	Polyesterimide	Polyamideimide	---	MW35C	200
EILOCKY	---	Polyesterimide	Polyamide	---	---	180
EILOCKW	---	Polyesterimide	Modified Epoxy	---	---	200
EIW	---	Polyesterimide	---	---	---	220
EIW-2	---	Polyesterimide	---	---	MW74-C	200
FL.EILOCKY	---	Modified Polyester	Polyamide	---	---	155
LSFFW	---	Polyurethane	---	---	MW79-C	155
LSUEW	---	Polyurethane	---	---	---	130
PEW	---	Polyester	---	---	---	155
PEY	---	Polyester	Nylon	---	MW24-C	155
SF.FLW	---	Modified Polyester	---	---	MW26C	155
SF.EIW	---	Polyesterimide	---	---	MW77C	180
SF.BY@	---	Modified Polyester	---	Nylon	MW27-C	155
SF.FLY@	---	Modified Polyester	---	Nylon	MW27-C	155
SF.BLOCKBS	---	Modified Polyester	---	Modified Polyamide	---	155
SF.EILOCKY#	---	Polyesterimide	---	Polyamide	---	180
SF.EILOCKBS	---	Polyesterimide	---	Modified Polyamide	---	180
SF.BW@	---	Modified Polyester	---	---	MW26C	155
SFFW	---	Polyurethane	---	---	MW79	155

A not-for-profit organization dedicated to public safety and committed to quality service

287806002 Page 1 of 2

Mtl Dsg	Mark Dsg	BC	Coat Typ	OC	ANSI Type	Temp Class
SFFY	---	Polyurethane	---	Polyamide	MW80C	155
UEW-1	---	Polyurethane	---	---	MW2-C	105
UEW-2	---	Polyurethane	---	---	---	130
UEW-4	---	Polyurethane	---	---	MW75C	130
UEY	---	Polyurethane	---	Nylon	MW28-C	130
UEY-2	---	Polyurethane	---	Polyamide	MW28-C	130

@-May be suffixed by LZ; # - May be suffixed by LZ, EL or LZI.
LZ - Signifies magned wires twisted together; EL - signifies base coated magnet wire laid parallel with top coat applied overall; LZL - signifies base coated magnet wire twisted together and covered with top coat overall.

Marking: Company name or trademarks (JSW) or 榮星電線, material designation or marked designation on packaed or reel, and Recognized Component Mark.

See General Information Preceding These Recognitions
For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

287806002 Page 2 of 2 OBMW2E174837
September 8, 2000

AE-001A

