

# XY2500FG-3.5 XY2500FC-3.81




## Dimensions

Poles:	(2P-24P)
Pitch:	3.5mm(.138") 3.81mm(.150")

## Electrical

Standard:	UL	IEC
Voltage Rating:	300V	250V
Current Rating:	8A	7A
Wire range:	28-16AWG	0.5-1.5mm <sup>2</sup>
Withstand voltage	AC2500V/Min	

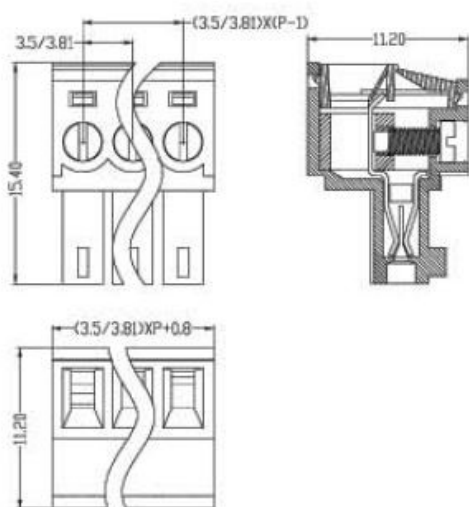

## Mechanical

Torque:	0.2N.m(1.7Lb-In.)
Ambient temperature	-40°C~+105°C
Strip length	6-7mm

## Material

Housing:	PA66(UL 94V-0)
Contact:	Phosphor Bronze,Nickel Plated
Wire Cage:	Brass,Nickel Plated
Screw:	M2,steel,A3 Zn plated