
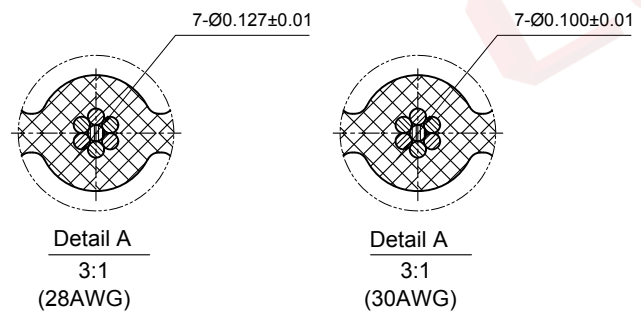
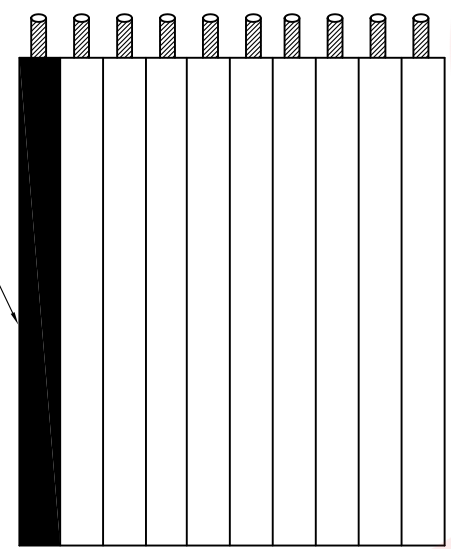


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/28/20'		

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY reserves the right to make changes to this document without notice and to exercise such rights to exercise such rights as it deems appropriate. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

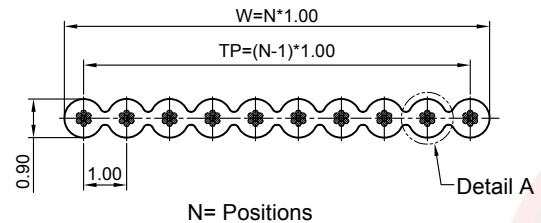

NOTES:

- 1. Materials:**
 - Insulation:PVC, Grey.
 - Conductor:Copper with tin plating.
- 2. Specification**
 - Rating: 300V
 - Conductor Size: 28~30AWG
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature:-20°C~70°C.
- 3. Application**
 - Internal wiring of computers,electronic exchanges,measurement control devices, business machines,communication devices, and other electronic equipment.

4. Product Number Code

DS1057-01 - X X X X X - X

- Packing Specifications
 - 30.5: 30.5M/reel
 - 60.1: 60.1M/reel
 - 76.5: 76.5M/reel
- Edge mark
 - R:Red mark
 - F:Flower mark
- Wire diameter
 - 1: Ø.100 (30AWG)
 - 2: Ø.127 (28AWG)
- Wire AWG
 - 28: 28AWG
 - 30: 30AWG
- Cable color
 - A: Gray
 - S: Dark grey
- No.Of positions
 - 10: 10pin
 - 64: 64pin

Number	Dimensions			Max. conductor resistance DC 20°C Ω/m
	TP(mm)	W(mm)	Tolerance	
10	9.00	10.00	±0.30	Ø.100<0.397 Ø.127<0.237
14	13.00	14.00	±0.30	
16	15.00	16.00	±0.30	
20	19.00	20.00	±0.30	
24	23.00	24.00	±0.30	
26	25.00	26.00	±0.30	
30	29.00	30.00	±0.30	
34	33.00	34.00	±0.40	
40	39.00	40.00	±0.40	
50	49.00	50.00	±0.40	
60	59.00	60.00	±0.40	
64	63.00	64.00	±0.40	

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	UL 2651 PITCH 1.00mm FLAT CABLE	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1057-01 SERIES	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNELY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1057-01-XXXX-X-A						

FOR TME ONLY

晨翔电子有限公司
 CONNELY ELECTRONIC CO. LTD